



# kendal slate™

GLAZED PORCELAIN





Photo features Kendal Slate™ Essdale Neutral 12 x 12 in brickwork pattern.

GLAZED PORCELAIN

# kendal slate™ WITH REVEAL IMAGING™

**Strength and beauty flawlessly converge in the brilliant interpretation of natural slate captured through the Kendal Slate collection. Enhanced with innovative Reveal Imaging, Kendal Slate is the premier choice for realistic, classic design. Take pleasure in its remarkably true visuals, smooth, inviting texture and easy maintenance that comes standard in porcelain tile.**

- Microban infusion delivers steadfast antimicrobial protection against odor causing bacteria, keeping tiles cleaner between cleanings
- Reveal Imaging™ fosters the true visual of three natural slate tones
- Made in the USA to assure enduring quality and elegant craftsmanship


## FIELD TILE



Ambleside Beige KS01



Easdale Neutral KS02

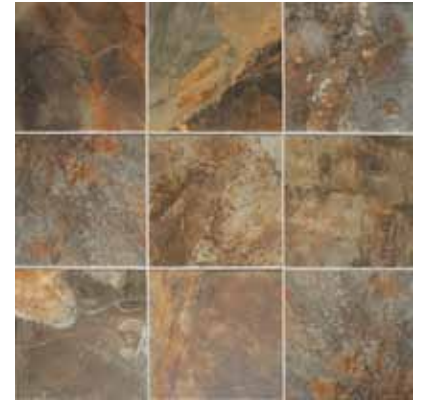

Carlisle Black KS03


## MOSAICS



Ambleside Beige KS01  
3 x 3 Mosaic




Easdale Neutral KS02  
3 x 3 Mosaic

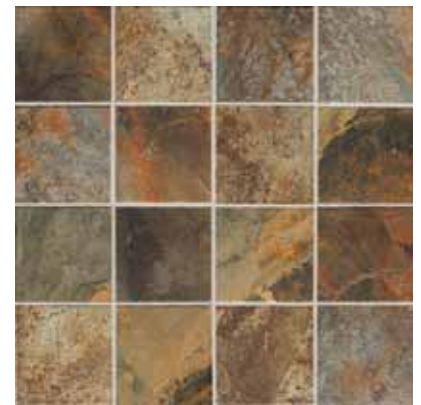

Carlisle Black KS03  
3 x 3 Mosaic


## SIZES, SHADE VARIATION & PRICING



**18 x 18 Field Tile**  
(17 3/4" x 17 3/4")  
(45.2 cm x 45.2 cm)




**12 x 18 Field Tile**  
(5 3/4" x 17 3/4")  
(45.2 cm x 30.0 cm)



**12 x 12 Field Tile**  
(11 13/16" x 11 13/16")  
(30.0 cm x 30.0 cm)



**6 x 6 Field Tile**  
(5 13/16" x 5 13/16")  
(14.7 cm x 14.7 cm)



**3 x 3 Mosaic**  
(11 13/16" x 11 13/16" sheet)  
(30.0 cm x 30.0 cm)  
Mesh-mounted, 16 pcs. per sheet



Tile Thickness: 5/16" Field Tile  
Recommended Grout Joint: 3/16" Field Tile, 1/8" Mosaics  
Relative Pricing: Medium/High

## TRIM



**Bullnose**  
S-43C9  
3 x 12



**Cove Base**  
S-36C9T ▲  
6 x 12




**Cove Corner**  
SC36C9T ▲  
1 x 6

▲ Ceramic clay body




## PATTERN IDEAS



### Steppingstone Pattern

39 pcs. per 100 s/f 12 x 12 39%  
244 pcs. per 100 s/f 6 x 6 61%



### Modified Hopscotch Pattern

20 pcs. per 100 s/f 18 x 18 45%  
20 pcs. per 100 s/f 12 x 18 30%  
20 pcs. per 100 s/f 12 x 12 20%  
20 pcs. per 100 s/f 6 x 6 5%

## PERFORMANCE CHARACTERISTICS

Field Tile:	C.O.F.		Moisture Absorption	Breaking Strength	MOH's	Abrasion Resistance	Chemical Resistance
	Wet	Dry					
	≥0.60	≥0.70	<0.5%	>300 lbs.	8.0	4	Resistant

### Cleaning Procedures

- Remove loose dust and dirt with a damp cloth or sponge
- Use a neutral, non-abrasive cleaner suitable for porcelain tile
- Remove cleaning solution with a clean, damp sponge or mop

### Installation Methods

#### Backing Materials

- Concrete
- Mortar bed
- Cementitious backer board

### Setting

- Latex modified thin-set
- Epoxy

### Grouting

- Sanded grout
- Sanded cement grout
- Epoxy grout
- Recommended grout joint:  
3/16" - Field Tile; 1/8" - Mosaics

## NOTES

Since there are variations in all fired ceramic products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

## APPLICATION

	INTERIOR			EXTERIOR	
	RES	LT COM	COM	RES	COM
Floors/Patios: Covered & Uncovered †	●	●	●	●	○
Walls/Backsplashes	●	●	●	●	●
Countertops	●	●	●	●	●
Pool Linings	●	●	●	●	●
Pool Decking	●	○	○	●	○

### APPLICATION NOTES:

† Water, oil, grease etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. Floor tile: Suitable for exterior applications in freezing and non-freezing climates when proper installation methods are followed.

Not for use on ramps.

- Strong random shading is a part of the natural beauty of this product. To achieve the maximum intended results, tile should be pulled from multiple cartons and placement decided upon prior to installation.
- All or select items within this series are made in the USA. For more information visit [www.americanolean.com](http://www.americanolean.com)
- For additional information, refer to Factors to Consider at [www.americanolean.com/CommercialFactors](http://www.americanolean.com/CommercialFactors).
- Use of a latex modified thin-set is recommended for proper installation.



Microban Antimicrobial Technology is not designed to replace normal cleaning practices or protect users against foodborne illness. Microban is a registered trademark of Microban Products Company.



American Olean Greenworks is part of the Mohawk Greenworks™ corporate initiative. Visit [mohawkgreenworks.com](http://mohawkgreenworks.com) for more details.