

San Martino™

Information

Applications

	Residential	Light Commercial	Commercial
Floors †	X	X	X
Walls/Backsplashes	X	X	X
Countertops	X	X	X
Pool Linings	X	X	X

† Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection and proper maintenance. For additional information, refer to "Factors to Consider" at www.americanolean.com/ResidentialFactors.

- Suitable for exterior walls in freezing and non-freezing climates only when proper installation methods are followed
- Not for use on ramps.
- Recommended use of latex modified thin set

Price Structure

Premier

Preferred

Stylish and elegant looks. Each tile is created through traditional firing processes and glaze techniques.

Premium

Sophisticated visuals and detailed surfacing. A process of multiple glazes results in an attractive, cultured surface.

Premier

Inherent visual color and depth. A complex process of design brings out the rich, more upscale texture and look of elegant porcelain as well as a variety of other tiles.

Prestige

Natural characteristics and realistic attributes. Captures the inherent beauty of natural stone. Highly complex design techniques are also applied to rich porcelains, unique glasses and other materials to create surfaces with distinctive physical and natural qualities.

Performance Characteristics


C.O.F. Wet	C.O.F. Dry	Moisture Absorption	Breaking Strength	Moh's	Chemical Resistance	Abrasion Resistance
≥0.60	≥0.65	<0.5%	>250 lbs.	8.5	Resistant	3

This tile meets or exceeds ANSI A137.1 standards

Abrasion Resistance Application Classifications ISO 10545-7

1 Light Residential 2 Heavy Residential 3 Light Commercial 4 Heavy Commercial

Patterns




Diamond

45 pcs. per 100 s/f
18" x 18" 100%

OR

100 pcs. per 100 s/f
13" x 13" 100%

* Dark lines indicate repeat



Vectored

39 pcs. per 100 s/f
13" x 13" 29%

95 pcs. per 100 s/f
6" x 13" 57%

54 pcs. per 100 s/f
6" x 6" 14%

Cleaning Procedures

- Remove loose dust and dirt with a damp cloth or a sponge
- Use a neutral, non-abrasive cleaner suitable for ceramic tile
- Remove cleaning solution with a clean, damp sponge or mop

Special Notes

Since there are variations in all fired ceramic products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

San Martino in Giallo 13" x 13", 6" x 13", 6" x 6" and 3" x 13" Universal Dots Accent. Vectored pattern shown.



Porcelain Floor Tile



San Martino™

Features

- Striking tones and unique surface
- Look of terra cotta
- Distinctive mosaic
- Unique Mediterranean style accents


Decorative Tile




Universal SA32 Dots Accent 3" x 13"



Universal SA32 Dots Accent 2" x 13"



Universal SA32 Mosaic Accent 2" x 13"

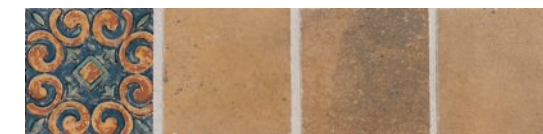

Universal SA32 Mosaic Accent 3" x 13**

* 3" x 13" Mosaic accents are produced randomly. Mediterranean designs on accents are intended to be complimentary to each other and are recommended to be installed randomly. Accents cannot be ordered specifically by design.

Field Tile



Giallo SA30




Universal SA32 Mosaic Sheet 2" x 2"
mesh mounted in 13" x 13" sheet




Rosso SA31


Coordinating Tile Suggestions



Saxon Metals™
Iron SX90



Stone Source™
Ubatuba NL20












Candalara Glass™
Cinnamon Spice CL53



Metal Works
Antique Bronze MW01

Sizes



Trim

Bullnose 3" x 13"
S43E9



Tile Thickness: 5/16"

Shade Variation: High

Recommended Grout Joint: 3/16"