



**coordinating decorative
accent ideas**

Indian Summer

Tumbled Stone
Indian Multicolor TS76
Diamond Accent Strip



Calais Springs

Tumbled Stone
Autumn Mist/Red TS95
Accent Strip



Sun Valley

Tumbled Stone
Antalya Dark/Sienna
Gold/Mediterranean Ivory TS67
Diamond Accent Strip



Napa Gold

Tumbled Stone
Silver Gray/Copper/
Ocean Green TS80
Diamond Accent Strip




Mojave Sunset

Tumbled Stone
Autumn Mist/Multi TS93
Accent Strip



field tile

Calais Springs VV02

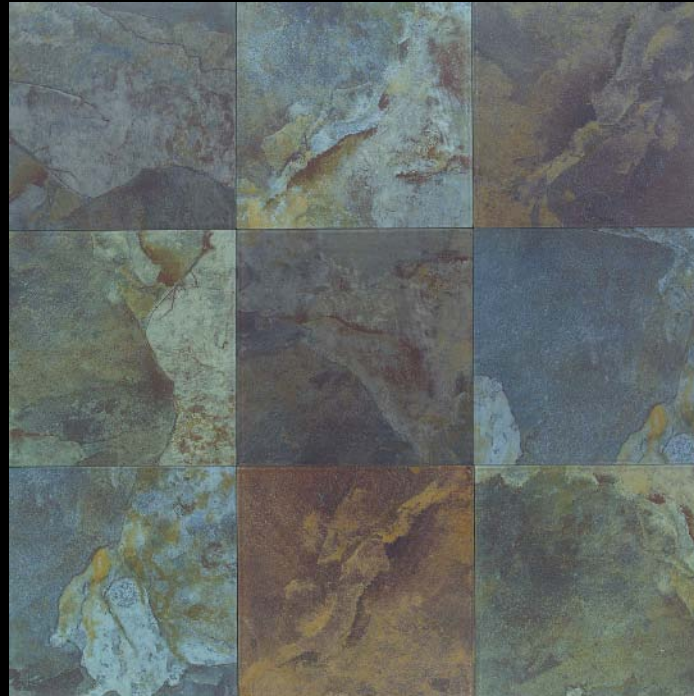

Sun Valley VV03



Napa Gold VV04



Mojave Sunset VV05







field tile

Indian Summer VV01






sizes:

-  18" x 18" Field Tile
Nominal: 17-3/4" x 17-3/4" (45.2 cm x 45.2 cm)
5/16" thick
Sq. ft. per carton: 15.75 Pieces per carton: 7
 -  12" x 18" Field Tile
Nominal: 11-13/16" x 17-3/4" (30.0 cm x 45.2 cm)
5/16" thick
Sq. ft. per carton: 13.50 Pieces per carton: 9
 -  12" x 12" Field Tile
Nominal: 11-13/16" x 11-13/16" (30.0 cm x 30.0 cm)
5/16" thick
Sq. ft. per carton: 15.0 Pieces per carton: 15
 -  6" x 6" Field Tile
Nominal: 5-13/16" x 5-13/16" (15.0 cm x 15.0 cm)
5/16" thick
Sq. ft. per carton: 11.0 Pieces per carton: 44
- Grout joint recommendation: 3/16"

shade variation:

 Random – Extreme color and texture variation from tile to tile and within each tile; a random look.

trim detail:

Type	Number	Size
 Bullnose	P-43C9	3" x 12"
 Cove Base	S-36C9TB	6" x 12"
 Cove Base Corner	SC-36C9TB	1" x 6"

approved usage: Floors, Walls, Countertops & Exteriors

F	W	C	E
Floors	Walls	Countertops	Exteriors

Water, oil, grease, etc. create slippery conditions. Floor applications with exposure to these conditions require extra caution in product selection. For additional product information, refer to "Factors to Consider" at www.daltile.com/ResidentialFactors. Application requirements vary for decorative accents. Not for use on ramps.

durability:

Floor Wear Resistance


1	Residential Bathrooms
2	All Residential Areas
3	All Residential/Light Commercial
4	All Residential/Commercial

slip resistance (wet):

The higher the rating, the higher the slip resistance.

1	<.50
2	.50 - .59
3	≥.60

tile pattern guide

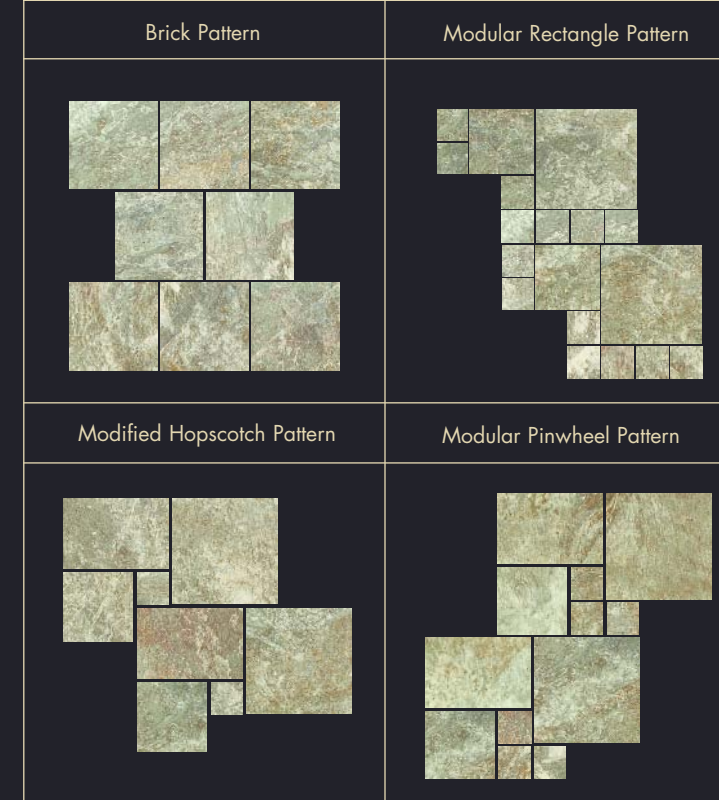

Note: Since there are variations in all fired ceramic products, the tile and trim supplied for your particular installation may not match these samples. Final selection should be made from actual tiles and trim, and not from tile and trim samples or color reproductions. Manufactured in accordance with ANSI A137.1 standards.

Strong random shading enhances the natural beauty of this product. To achieve optimal results, tile should be selected from multiple cartons and shading arrangement planned prior to installation.



7834 C.F. Hawn Freeway
Dallas, TX 75217
214-398-1411. 800-933-TILE

For more information about DalTile products and services, visit our website at daltileproducts.com